

Area of Application

ESSVE Wood connector screw with fibre cut designed for installation in wood fittings outdoors, against wood.

Description

The screw is produced in hardened carbon steel with CorrSeal surface treatment. It co-

mes with TX-drive/bits.

Equipped with 1 fibre cut at the point to reduce drive-in torque in harder woods.

Installation

Recommended rpm: 400-1200/min.



CorrSeal

ESSVE CorrSeal surface treatment.




Type approved by SITAC No. 0075/05

Specification

Material	Hardened steel SAE C1018	
Surface treatment	CorrSeal	Bright zinc plated
Corrosion category	C4	

Wood connector screw with fibre cut, CorrSeal

ESSBOX

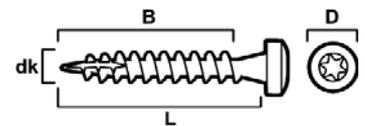

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/pack.	Pack./large pack.
102667	5,0 x 40	8,0	36,0	TX20	203	250	8

ESSBOX bucket

Item no.	Dimensions dk x L mm	D mm	B mm	Bit no	Qty/pack	Pack./large pack.
102267	5,0 x 40	8,0	36,0	TX20	1200	1

Small package

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Qty/pack.	Pack./large pack.
413350	5,0 x 40	8,0	36,0	TX20	20	10