

Area of Application

ESSVE Construction screw, A-thread with flange head, Ø 14 mm designed for installing the sheet-metal on wood.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment. Fitted with hex head.

Installation



Recommended rpm: 1800-2500/min

Specification

Material	Hardened steel SAE1018
Surface treatment	Bright zinc plated 12 µm
Corrosion categories	C1

Construction screw with flange head, bright zinc plated

ESSBOX

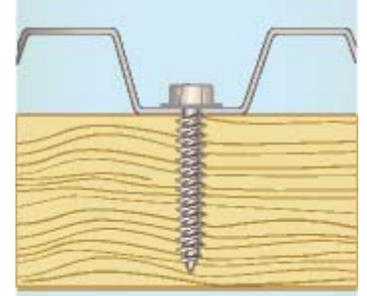

Item no.	Dimension dk x L mm	Key width mm	ESSBOX size	Qty/pack.	Pack./large pack.
63336	6,5 x 38	8	204	200	6
63337	6,5 x 50	8	304	150	4
63338	6,5 x 64	8	304	100	4
63339	6,5 x 75	8	304	100	4